

# EC Centrifugal Fans

Backward Curved,  $\Phi 190$

## EC后向离心风机




**Impeller:** Plastic PP  
**Motor:** EC brushless external rotor motor  
**Insulation:** Class B  
**Approvals:** UL E306337  
**Operating Temperature:** -20~+60°C  
**Technical Features:** Control input 0-10VDC/PWM, tach output. Locked rotor protection, reverse polarity. Current limited, soft start

叶轮材质: 塑胶PP  
 电机类型: EC无刷外转子电机  
 绝缘等级: Class B  
 产品符合的认证: UL E306337  
 工作温度: -20~+60°C  
 技术特性: 调速输入0-10VDC/PWM, 调速信号输出, 堵转, 极性、限流保护, 软启动

### 技术参数 Specifications

Listed Model 产品型号	Rated Voltage	Operating Voltage	Rated Current	Rated Power	Rated Speed	Air Flow		Air Pressure		Noise Level	Net Weight
	额定电压	工作电压	额定电流	额定功率	额定转速	风量	风量	风压	风压	噪音	重量
Part NO.	VAC	VAC	A	W	RPM	CFM	m <sup>3</sup> /h	mmH <sub>2</sub> O	inH <sub>2</sub> O	dBA	Kg
P11E19064UB2M	115	92~138	2.5	170.0	4,060	486	825	73.0	2.87	75.0	1.64
P12E19064UB2M	230	184~276	1.33	170.0	4,060	486	825	73.0	2.87	75.0	1.64

### 外形 Outline

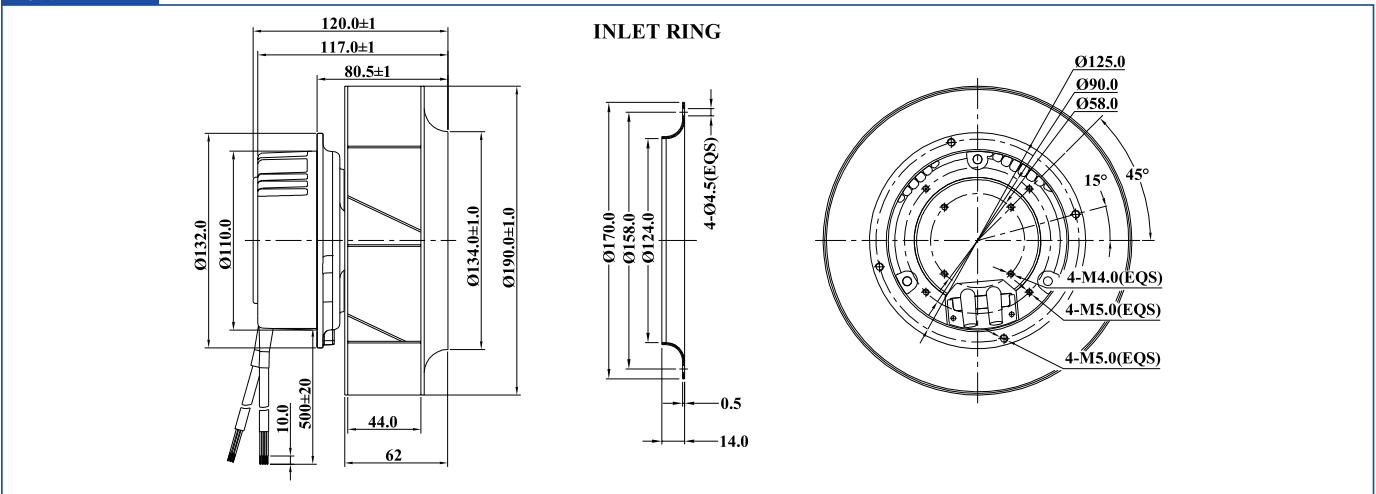

### 曲线 Curves

